


## Indoor Low PIM 617MHz to 6000MHz Dual Polarized Omni Ceiling Antenna

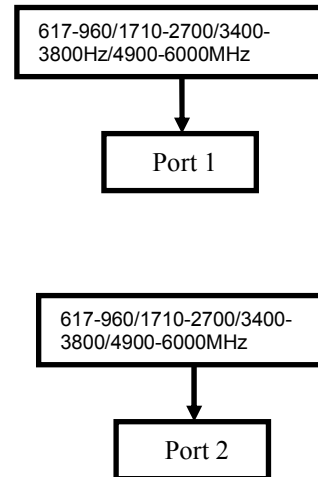

Electrical Specifications						
<b>Model</b>	<b>STOC66G3AM2-P43</b>					
Frequency Range (MHz)	617-806	806-960	1350-1550	1690-2700	3300-3800	4900-6000
Gain (dBi)	1.5±0.5	2.2±0.5	3.5±0.5	4.5±1.0	6.0±1.0	6.0±1.0
<b>Polarization</b>	<b>Linear Horizontal x 2</b>					
VSWR	≤1.8	≤1.8	≤1.8	≤1.8	≤1.8	≤1.8
Isolation (dB)	≥16	≥18	≥18	≥20	≥30	≥30
PIM, Third Order, 2 x 20 W	≤-153 dBc					
Maximum Power	50 W					
Impedance	50 Ω					
Lightning Protection	DC Ground					
Mechanical Specifications						
Connector Type	2 x N-female /4.3-10-female					
Dimensions	Φ266×18mm					
Antenna Weight	0.5 KG					
Radome Material	ABS, White, RAL9003					
Mounting Type	Ceiling Mount via holes					
Operational Humidity	< 95%					
Operational Temperature	-40℃ to +65℃					

### SANNY TELECOM EQUIPMENT CO., LTD

Address: 3rd Floor, Building 3 Section B, Shihuzhou Industrial Zone, Sanshui District, Foshan City, Guangdong Province, China




Tel: +86 757 8766 0070

Email: [sales@sannytelecom.com](mailto:sales@sannytelecom.com)




Fax: +86 757 8766 0500

Website: [www.sannytelecom.com](http://www.sannytelecom.com)

**Horizontal  
pattern**

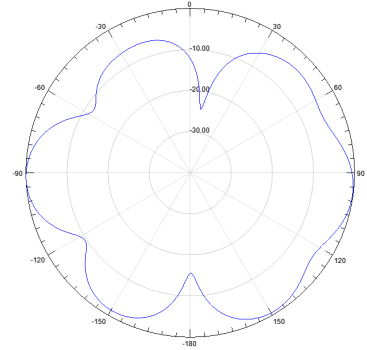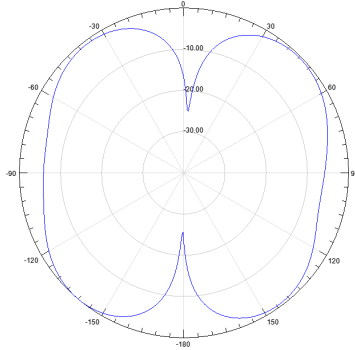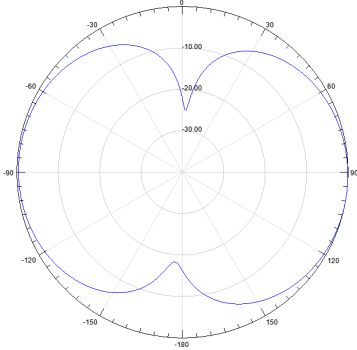

**Vertical  
pattern**

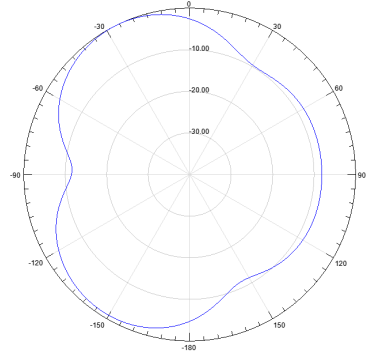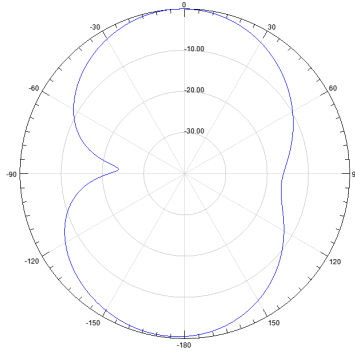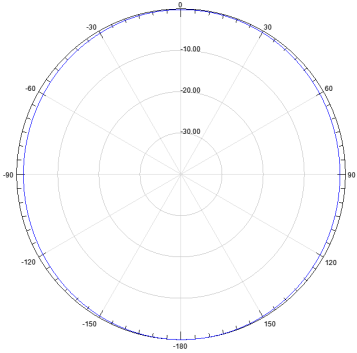

900MHz

1710MHz

3500MHz

**SANNY TELECOM EQUIPMENT CO., LTD**

Address: 3rd Floor, Building 3 Section B, Shihuzhou Industrial Zone, Sanshui District,  
Foshan City, Guangdong Province, China

Tel: +86 757 8766 0070

Email: [sales@sannytelecom.com](mailto:sales@sannytelecom.com)

Fax: +86 757 8766 0500

Website: [www.sannytelecom.com](http://www.sannytelecom.com)