



## 4900-7125MHz 34dBi Dual-Polarity & X-Polarized Dish Antenna

Model	STD4971G34M2-PRO		
<b>Electrical Specifications</b>			
Frequency Range (MHz)	4900-5150	5150-5850	5850-7125
Polarization	Adjustable - Dual Polarized (Vertical and Horizontal) or X-Polarized (+45° and -45°)		
Gain	33 ±1 dBi		
VSWR	≤2.5	≤2.0	≤2.0
Horizontal Beamwidth	2.5°		
Vertical Beamwidth	2.5°		
F/B Ratio	≥42 dB		
Isolation	≥28 dB		
Nominal Impedance	50Ω		
Maximum Power	50W		
Lightning protection	DC Ground		
<b>Mechanical Specifications</b>			
Connector	2 x N-Female		
Mounting Mast size	Φ40-70mm		
Dimensions	Φ90cm		
Weight	9.9 KG		
Max. Wind Velocity	210km/h		
Operating Temperature	-40~+60°C		

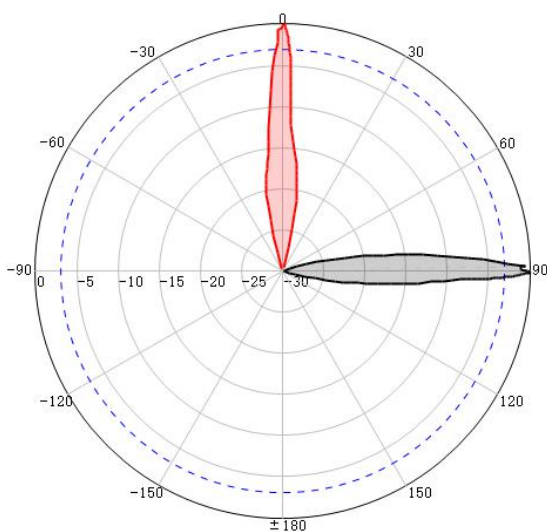

H-Pol

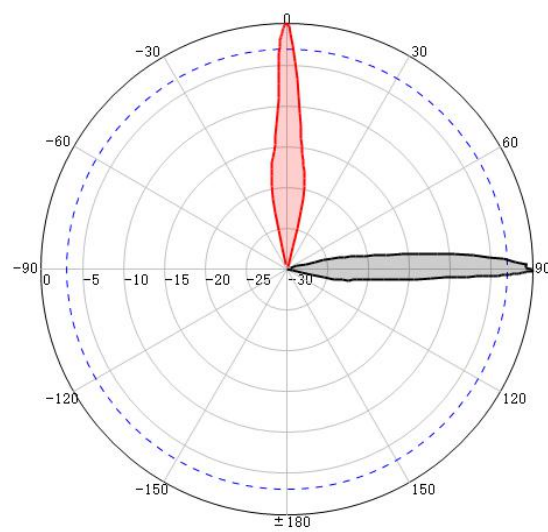

V-Pol

### SANNY TELECOM EQUIPMENT CO., LTD

Address: Room 201 Building 1, Wanyang Industrial Park, No.82 Xiaotang Industrial Avenue, Shishan Town, Nanhai District, Foshan City 528223, Guangdong Province, China

Tel: +86 757 8766 0070

Fax: +86 757 8766 0500

Email: sales@sannytelecom.com

Website: [www.sannytelecom.com](http://www.sannytelecom.com)