



4900-6500MHz 23dBi Dual-Polarity & X-Polarized Dish Antenna

| Model | STD6G23M2 | | |
|----------------------------------|-------------------------------------------------------------------------------------|-----------|-----------|
| Electrical Specifications | | | |
| Frequency Range (MHz) | 4900-5150 | 5150-6400 | 6400-6500 |
| Polarization | Adjustable -Dual Polarized (Vertical and Horizontal) or X-Polarized (+45° and -45°) | | |
| Gain | 23 ± 1 dBi | | |
| VSWR | ≤2.0 | ≤2.0 | ≤2.2 |
| Horizontal Beamwidth | 9° | | |
| Vertical Beamwidth | 8° | | |
| F/B Ratio | ≥32dB | | |
| Isolation | ≥28dB | | |
| Nominal Impedance | 50Ω | | |
| Maximum Power | 100W | | |
| Lightning protection | DC Ground | | |
| Mechanical Specifications | | | |
| Connector | 2xN-Female | | |
| Mounting Mast size | Φ30-55mm | | |
| Dimensions | Φ36cm | | |
| Weight | 1.65kg | | |
| Max. Wind Velocity | 210km/h | | |
| Operating Temperature | -40~+60°C | | |

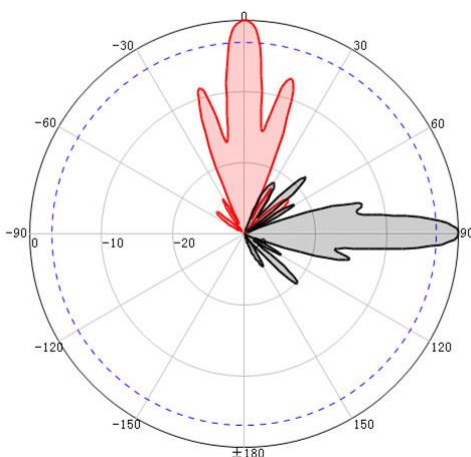

H-Pol

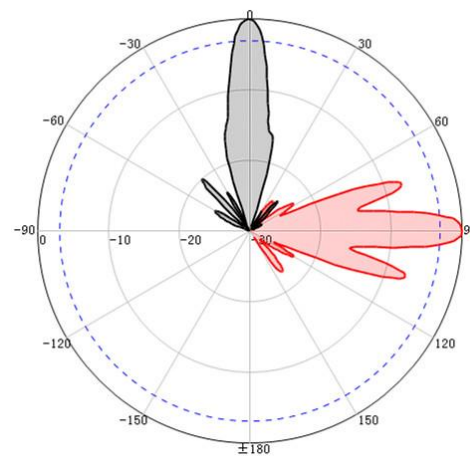

V-Pol

SANNY TELECOM EQUIPMENT CO., LTD

Address: Room 201 Building 1, Wanyang Industrial Park, No.82 Xiaotang Industrial Avenue, Shishan Town, Nanhai District, Foshan City 528223, Guangdong Province, China

Tel: +86 757 8766 0070

Fax: +86 757 8766 0500

Email: sales@sannytelecom.com

Website: www.sannytelecom.com