



4800-6500MHz 30dBi Dual-Polarity & X-Polarized Dish Antenna

Model	STD6G30M2		
Electrical Specifications			
Frequency Range (MHz)	4800-5150	5150-6400	6400-6500
Polarization	Adjustable - Dual Polarized (Vertical and Horizontal) or X-Polarized (+45° and -45°)		
Gain	30 ± 1 dBi		
VSWR	≤2.2	≤2.0	≤2.0
Horizontal Beamwidth	5°		
Vertical Beamwidth	4°		
F/B Ratio	≥32dB		
Isolation	≥28dB		
Nominal Impedance	50Ω		
Maximum Power	100W		
Lightning protection	DC Ground		
Mechanical Specifications			
Connector	2 x N-Female		
Mounting Mast size	Φ40-70mm		
Dimensions	Φ60cm		
Weight	4.6 KG		
Max. Wind Velocity	210km/h		
Operating Temperature	-40~+60℃		

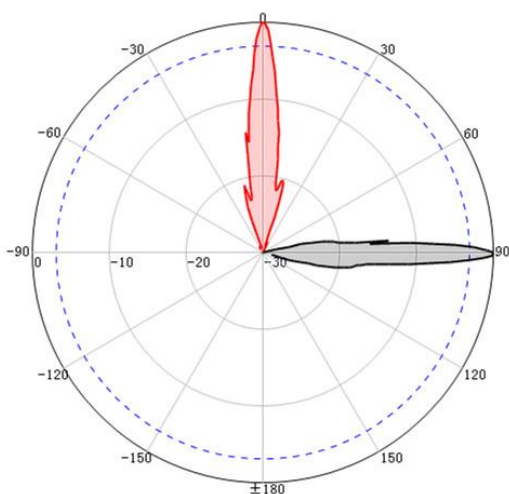

H-Pol

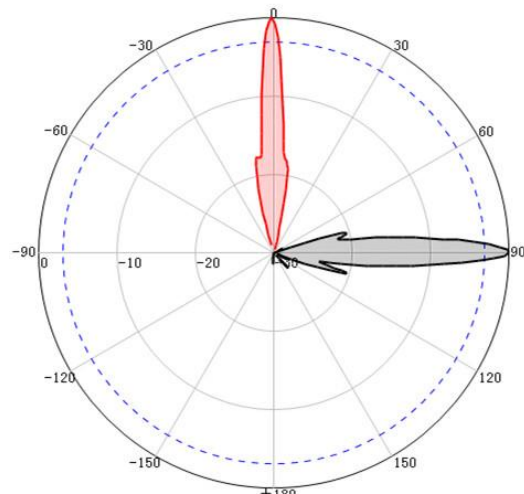

V-Pol

SANNY TELECOM EQUIPMENT CO., LTD

Address: Room 201 Building 1, Wanyang Industrial Park, No.82 Xiaotang Industrial Avenue, Shishan Town, Nanhai District, Foshan City 528223, Guangdong Province, China

Tel: +86 757 8766 0070

Fax: +86 757 8766 0500

Email: sales@sannytelecom.com

Website: www.sannytelecom.com