Indoor Low PIM 617MHz to 6000MHz MIMO Omni Ceiling Antenna

Electrical Specifications					
Model	**STOC66G3A-P43**				
Frequency Range (MHz)	617-698	698-960	1710-2700	3400-4000	4900-6000
Gain (dBi)	1.8±0.5	2.0±0.5	3.0±1.0	4.0±1.0	4.5±1.0
Polarization	Vertical				
VSWR	≤1.8	≤1.8	≤1.5	≤1.7	≤1.7
Horizontal Beamwidth	360°				
Vertical Beamwidth	90°	80°	35°	30°	28°
PIM, Third Order 2 x 20 W	≤-153 dBc				
Maximum Power	50 W				
Impedance	50 Ω				
Lightning Protection	DC Ground				

Mechanical Specifications	
Connector Type	4.3-10-female
Dimensions	Φ225×150mm
Antenna Weight	0.45 KG
Radome Material	ABS, White, RAL9003
Mounting Type	Ceiling Mount via holes
Operational Humidity	< 95%
Operational Temperature	-40℃ to +65℃

SANNY TELECOM EQUIPMENT CO., LTD
Address: Room 201 Building 1, Wanyang Industrial Park, No.82 Xiaotang Industrial Avenue, Shishan Town, Nanhai District, Foshan City 528223, Guangdong Province, China
Tel: +86 757 8766 0070 Fax: +86 757 8766 0500
Email: sales@sannytelecom.com Website: www.sannytelecom.com

Horizontal pattern

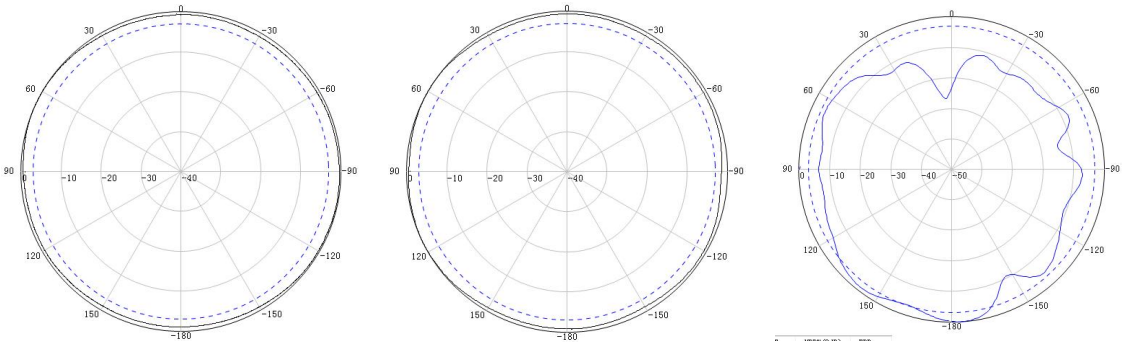

Vertical pattern

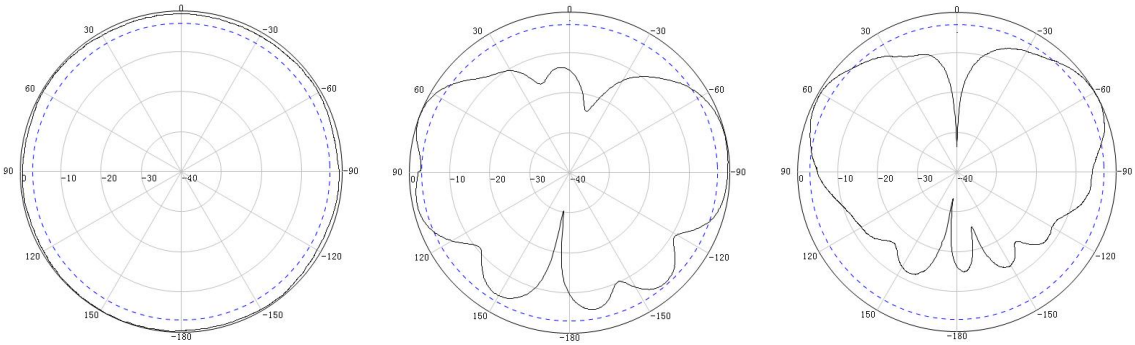

900MHz 1710MHz 2500MHz

SANNY TELECOM EQUIPMENT CO., LTD
Address: Room 201 Building 1, Wanyang Industrial Park, No.82 Xiaotang Industrial Avenue, Shishan Town, Nanhai District, Foshan City 528223, Guangdong Province, China
Tel: +86 757 8766 0070 Fax: +86 757 8766 0500
Email: sales@sannytelecom.com Website: www.sannytelecom.com