

Indoor Low PIM 617MHz to 6000MHz MIMO Omni Ceiling Antenna



Electrical Specifications					
Model	STOC66G3A-P43				
Frequency Range (MHz)	617-698	698-960	1710-2700	3400-4000	4900-6000
Gain (dBi)	1.8±0.5	2.0±0.5	3.0±1.0	4.0±1.0	4.5±1.0
Polarization	Vertical				
VSWR	≤1.8	≤1.8	≤1.5	≤1.7	≤1.7
Horizontal Beamwidth	360°				
Vertical Beamwidth	90°	80°	35°	30°	28°
PIM, Third Order 2 x 20 W	≤-153 dBc				
Maximum Power	50 W				
Impedance	50 Ω				
Lightning Protection	DC Ground				
Mechanical Specifications					
Connector Type	4.3-10-female				
Dimensions	Φ225×150mm				
Antenna Weight	0.45 KG				
Radome Material	ABS, White, RAL9003				
Mounting Type	Ceiling Mount via holes				
Operational Humidity	< 95%				
Operational Temperature	-40°C to +65°C				

SANNY TELECOM EQUIPMENT CO., LTD

Address: Room 201 Building 1, Wanyang Industrial Park, No.82 Xiaotang Industrial Avenue,
Shishan Town, Nanhai District, Foshan City 528223, Guangdong Province, China


Tel: +86 757 8766 0070

Fax: +86 757 8766 0500


Email: sales@sannytelecom.com

Website: www.sannytelecom.com

Horizontal pattern

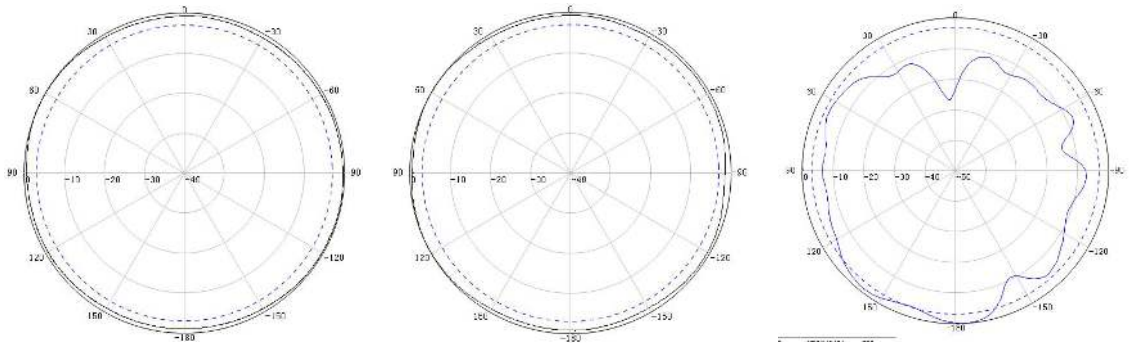

Vertical pattern

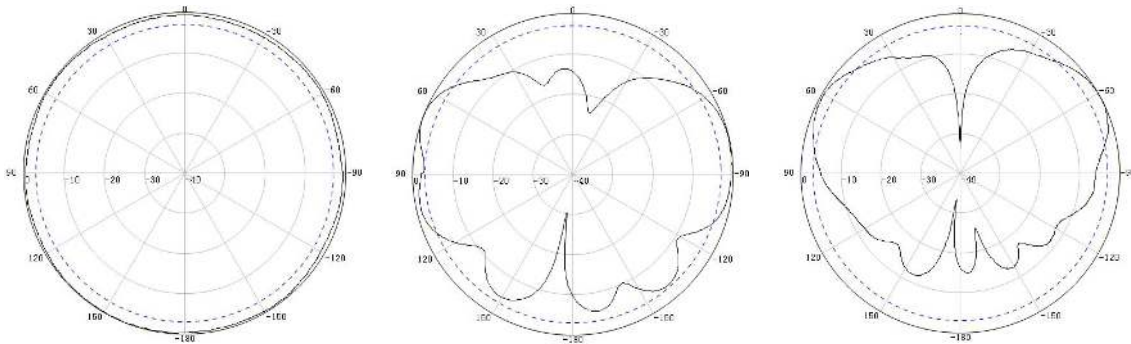

900MHz

1710MHz

2500MHz

SANNY TELECOM EQUIPMENT CO., LTD

Address: Room 201 Building 1, Wanyang Industrial Park, No.82 Xiaotang Industrial Avenue,
Shishan Town, Nanhai District, Foshan City 528223, Guangdong Province, China

Tel: +86 757 8766 0070

Fax: +86 757 8766 0500

Email: sales@sannytelecom.com

Website: www.sannytelecom.com