

## Indoor Low PIM 617MHz to 6000MHz MIMO Omni Ceiling Antenna



Electrical Specifications					
Model	STOC66G3AM4-P43				
Frequency Range (MHz)	617-698	698-960	1695-2700	3300-4000	4800-6000
Gain (dBi)	3±1.0	3±1.0	4.5±1.0	4.5±1.0	4.5±1.0
Polarization	Linear Horizontal x 4				
VSWR	≤1.8	≤1.8	≤1.8	≤1.8	≤1.8
Isolation (dB)	≥18	≥18	≥20	≥30	≥30
PIM, Third Order, 2 x 20 W	≤-153 dBc				
Maximum Power	50 W				
Impedance	50 Ω				
Lightning Protection	DC Ground				
Mechanical Specifications					
Connector Type	4 x 4.3-10-female				
Dimensions	Φ360×24mm				
Antenna Weight	0.95 KG				
Radome Material	ABS, White, RAL9016				
Mounting Type	Ceiling Mount via holes				
Operational Humidity	< 95%				
Operational Temperature	-40°C to +65°C				

### SANNY TELECOM EQUIPMENT CO., LTD

Address: Room 201 Building 1, Wanyang Industrial Park, No.82 Xiaotang Industrial Avenue, Shishan Town, Nanhai District, Foshan City 528223, Guangdong Province, China




Tel: +86 757 8766 0070

Fax: +86 757 8766 0500




Email: sales@sannytelecom.com

Website: [www.sannytelecom.com](http://www.sannytelecom.com)

**Horizontal  
pattern**

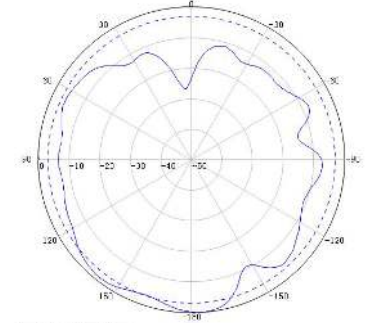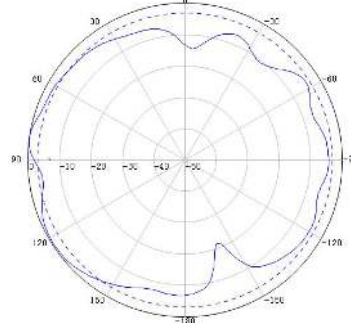

**Vertical  
pattern**

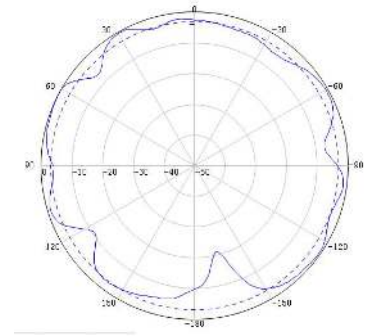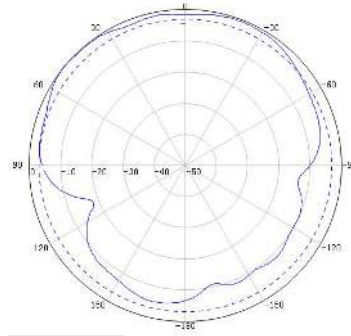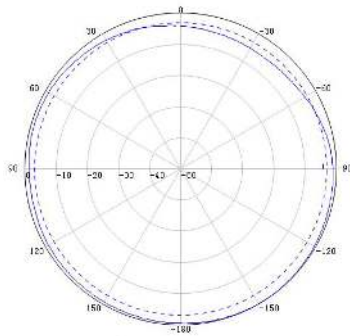

900MHz

1710MHz

3500MHz

**SANNY TELECOM EQUIPMENT CO., LTD**

Address: Room 201 Building 1, Wanyang Industrial Park, No.82 Xiaotang Industrial Avenue,  
Shishan Town, Nanhai District, Foshan City 528223, Guangdong Province, China

Tel: +86 757 8766 0070

Fax: +86 757 8766 0500

Email: [sales@sannytelecom.com](mailto:sales@sannytelecom.com)

Website: [www.sannytelecom.com](http://www.sannytelecom.com)