Indoor Low PIM 617MHz to 6000MHz MIMO Omni Ceiling Antenna

Electrical Specifications					
Model	**STOC66G3AM4-P43**				
Frequency Range (MHz)	617-698	698-960	1695-2700	3300-4000	4800-6000
Gain (dBi)	3±1.0	3±1.0	4.5±1.0	4.5±1.0	4.5±1.0
Polarization	**Linear Horizontal x 4**				
VSWR	≤1.8	≤1.8	≤1.8	≤1.8	≤1.8
Isolation (dB)	≥18	≥18	≥20	≥30	≥30
PIM, Third Order, 2 x 20 W	≤-153 dBc				
Maximum Power	50 W				
Impedance	50 Ω				
Lightning Protection	DC Ground				

Mechanical Specifications	
Connector Type	4 x 4.3-10-female
Dimensions	Φ360×24mm
Antenna Weight	0.95 KG
Radome Material	ABS, White, RAL9016
Mounting Type	Ceiling Mount via holes
Operational Humidity	< 95%
Operational Temperature	-40℃ to +65℃

SANNY TELECOM EQUIPMENT CO., LTD
Address:Room 201 Building 1, Wanyang Industrial Park, No.82 Xiaotang Industrial Avenue, Shishan Town, Nanhai District, Foshan City 528223, Guangdong Province, China
Tel: +86 757 8766 0070 Fax: +86 757 8766 0500
Email: sales@sannytelecom.com Website: www.sannytelecom.com

Horizontal pattern



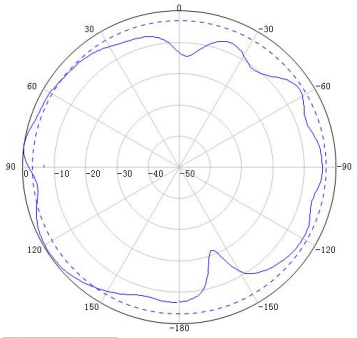

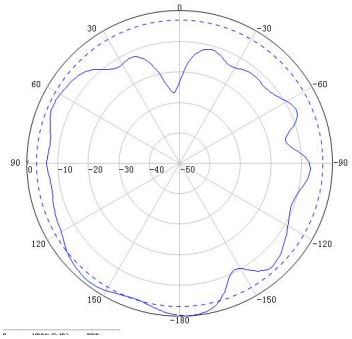

Vertical pattern

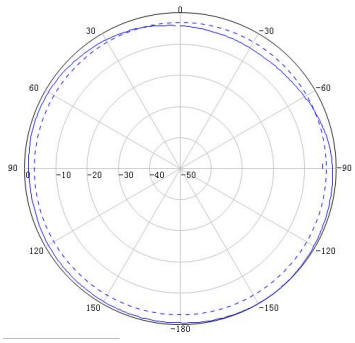

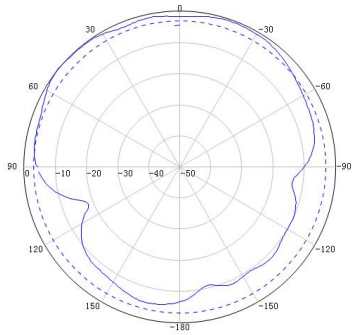

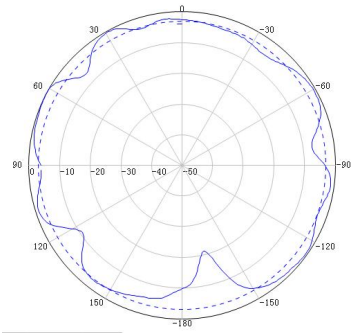

900MHz 1710MHz 3500MHz

SANNY TELECOM EQUIPMENT CO., LTD
Address:Room 201 Building 1, Wanyang Industrial Park, No.82 Xiaotang Industrial Avenue, Shishan Town, Nanhai District, Foshan City 528223, Guangdong Province, China
Tel: +86 757 8766 0070 Fax: +86 757 8766 0500
Email: sales@sannytelecom.com Website: www.sannytelecom.com