


## Indoor Low PIM 698MHz to 4000MHz Dual Polarized Omni Ceiling Antenna

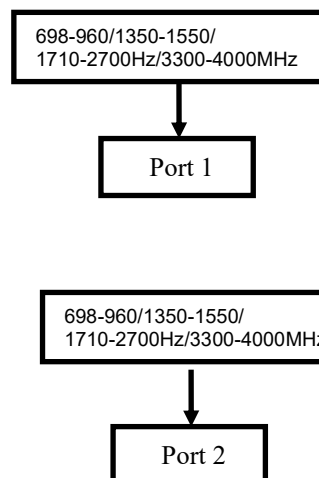

Electrical Specifications					
Model	STOC74G3AM2-P43				
Frequency Range (MHz)	698-806	806-960	1350-1550	1710-2700	3300-4000
Gain (dBi)	1.5±0.5	2.2±0.5	3.5±0.5	4.5±1.0	6.0±1.0
Polarization	Linear Horizontal x 2				
VSWR	≤1.8	≤1.8	≤2.0	≤1.8	≤1.8
Isolation (dB)	≥16	≥16	≥15	≥20	≥25
PIM, Third Order, 2 x 20 W	≤-153 dBc				
Maximum Power	50 W				
Impedance	50 Ω				
Lightning Protection	DC Ground				
Mechanical Specifications					
Connector Type	2 x 4.3-10-female				
Dimensions	Φ266×18mm				
Antenna Weight	0.5 KG				
Radome Material	ABS, White, RAL9003				
Mounting Type	Ceiling Mount via holes				
Operational Humidity	< 95%				
Operational Temperature	-40°C to +65°C				

### SANNY TELECOM EQUIPMENT CO., LTD

Address: Room 201 Building 1, Wanyang Industrial Park, No.82 Xiaotang Industrial Avenue, Shishan Town, Nanhai District, Foshan City 528223, Guangdong Province, China




Tel: +86 757 8766 0070

Fax: +86 757 8766 0500




Email: sales@sannytelecom.com

Website: [www.sannytelecom.com](http://www.sannytelecom.com)

**Horizontal  
pattern**

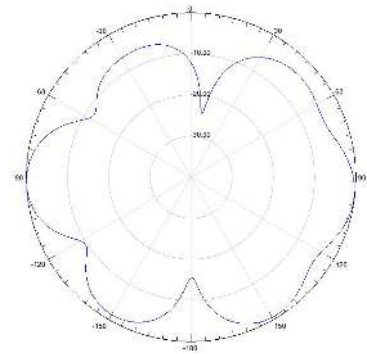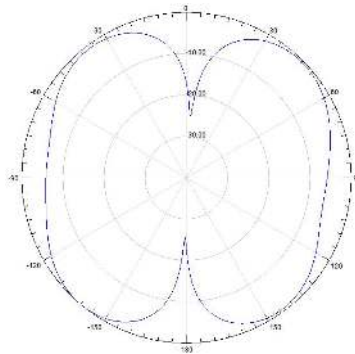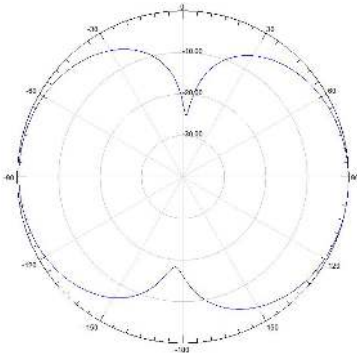

**Vertical  
pattern**

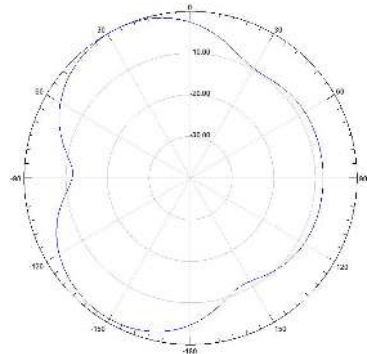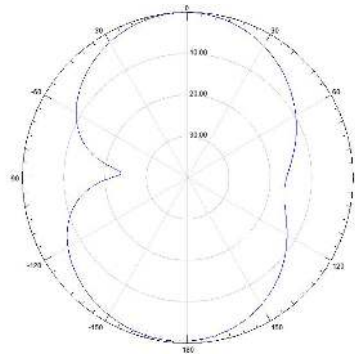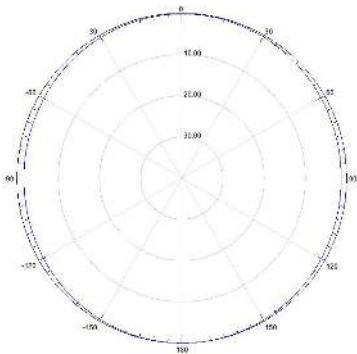

900MHz

1710MHz

3500MHz

**SANNY TELECOM EQUIPMENT CO., LTD**

Address: Room 201 Building 1, Wanyang Industrial Park, No.82 Xiaotang Industrial Avenue,  
Shishan Town, Nanhai District, Foshan City 528223, Guangdong Province, China

Tel: +86 757 8766 0070

Fax: +86 757 8766 0500

Email: [sales@sannytelecom.com](mailto:sales@sannytelecom.com)

Website: [www.sannytelecom.com](http://www.sannytelecom.com)