


Indoor Low PIM Wide Band 698MHz to 4000MHz Omni Ceiling Antenna

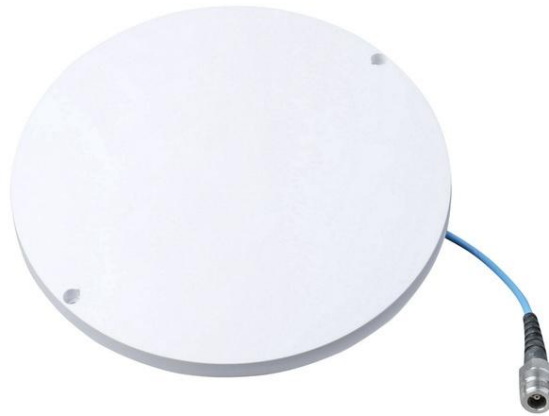

Electrical Specifications					
Model	STOC74G3B-P43				
Frequency Range (MHz)	698-806	806-960	1350-1550	1710-2700	3300-4000
Gain (dBi)	1.5±0.5	2.2±0.5	3.5±0.5	4.5±1.0	6.0±1.0
Polarization	Linear				
VSWR	≤1.8	≤1.8	≤2.0	≤1.8	≤1.8
PIM, Third Order, 2 x 20 W	≤-153 dBc				
Maximum Power	50 W				
Impedance	50 Ω				
Lightning Protection	DC Ground				
Mechanical Specifications					
Connector Type	4.3-10-female				
Dimensions	Φ220×18mm				
Antenna Weight	0.3 KG				
Radome Material	ABS, White, RAL9003				
Mounting Type	Ceiling Mount via holes				
Operational Humidity	< 95%				
Operational Temperature	-40°C to +65°C				

SANNY TELECOM EQUIPMENT CO., LTD

Address: Room 201 Building 1, Wanyang Industrial Park, No.82 Xiaotang Industrial Avenue, Shishan Town, Nanhai District, Foshan City 528223, Guangdong Province, China




Tel: +86 757 8766 0070

Fax: +86 757 8766 0500




Email: sales@sannytelecom.com

Website: www.sannytelecom.com

**Horizontal
pattern**

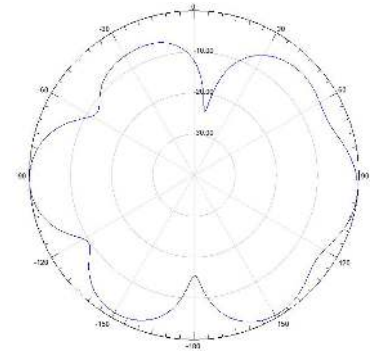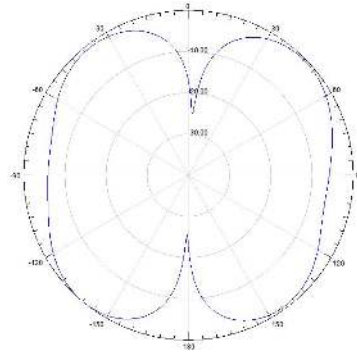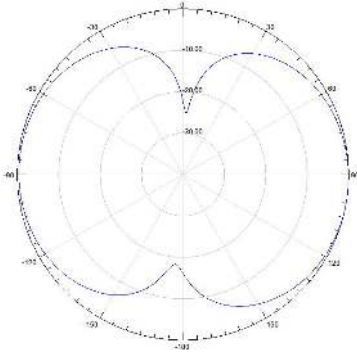

**Vertical
pattern**

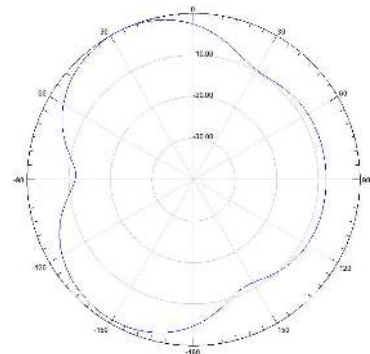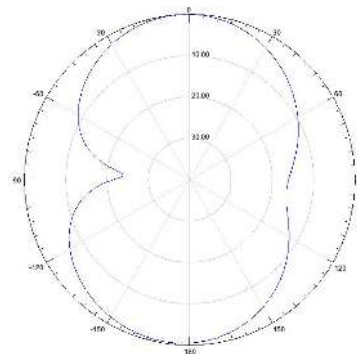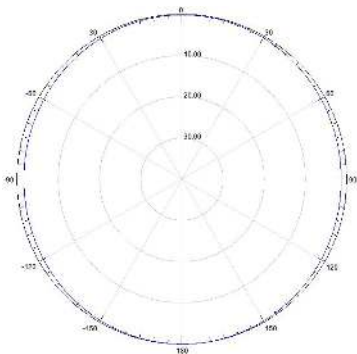

900MHz

1710MHz

2500MHz

SANNY TELECOM EQUIPMENT CO., LTD

Address: Room 201 Building 1, Wanyang Industrial Park, No.82 Xiaotang Industrial Avenue,
Shishan Town, Nanhai District, Foshan City 528223, Guangdong Province, China

Tel: +86 757 8766 0070

Fax: +86 757 8766 0500

Email: sales@sannytelecom.com

Website: www.sannytelecom.com