


2400-2500/5150-5850MHz 15dBi 4x4 MIMO Panel Antenna


Model	STP2458G15HVM4
Electrical Specifications	
Frequency Range	2400-2500/5150-5850MHz
Polarization	Horizontal(2x) + Vertical(2x)
Gain	14dBi(2.4GHz) / 15dBi(5GHz)
VSWR	≤2.0
Horizontal Beamwidth	(2.4GHz)45° , (5GHz) 25°
Vertical Beamwidth	(2.4GHz)43° , (5GHz) 23°
Cross-Pol Isolation	≤ -28dB
Nominal Impedance	50Ω
Maximum Power	50W
Lightning Protection	DC Ground



Mechanical Specifications	
Connector	4x N-Female
Mounting Mast size	Φ30- 50mm
Dimensions	305x305x20mm
Weight	1.55 KG
Radome Material	UV-ABS
Max. Wind Velocity	210km/h
Operating Temperature	-40~+60℃

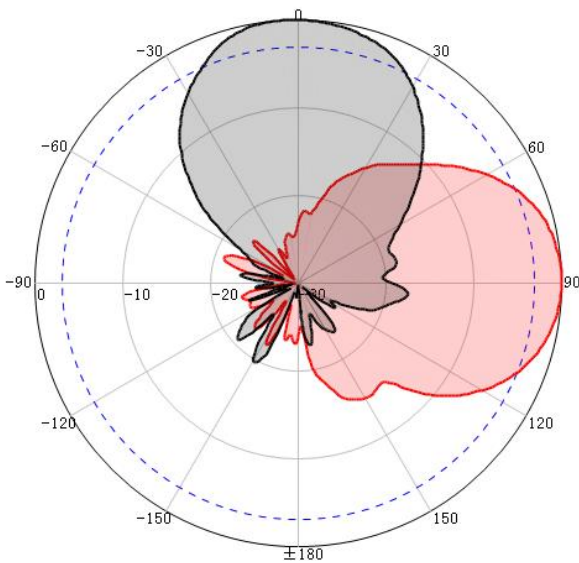

2.4GHz

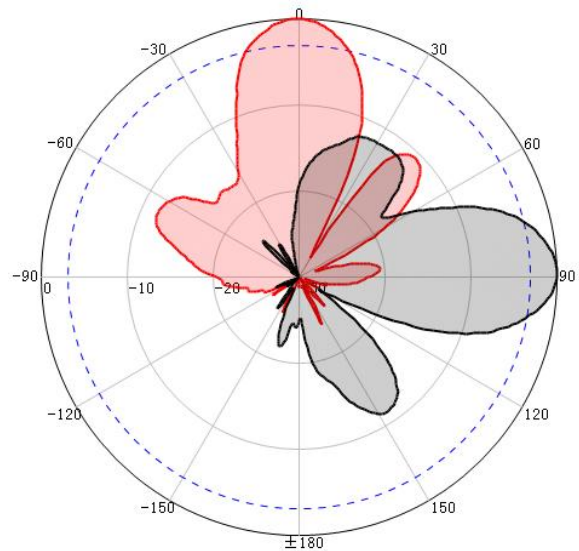

5GHz

SANNY TELECOM EQUIPMENT CO., LTD

Address: Room 201 Building 1, Wanyang Industrial Park, No.82 Xiaotang Industrial Avenue, Shishan Town, Nanhai District, Foshan City 528223, Guangdong Province, China

Tel: +86 757 8766 0070

Fax: +86 757 8766 0500

Email: sales@sannytelecom.com

Website: www.sannytelecom.com