


2400-2500/5150-5850MHz 15dBi Dual Slant Panel Antenna


| Model | STP2458G15XM2 |
|----------------------------------|-----------------------------|
| Electrical Specifications | |
| Frequency Range | 2400-2500/5150-5850MHz |
| Polarization | ±45° |
| Gain | 12dBi(2.4GHz) / 15dBi(5GHz) |
| VSWR | ≤2.0 |
| Horizontal Beamwidth | (2.4GHz)43° , (5GHz) 25° |
| Vertical Beamwidth | (2.4GHz)41° , (5GHz) 25° |
| Port-to-Port Isolation | > 28dB |
| Nominal Impedance | 50Ω |
| Maximum Power | 50W |
| Lightning Protection | DC Ground |



| | |
|----------------------------------|--------------|
| Mechanical Specifications | |
| Connector | 2x N-Female |
| Mounting Mast Size | Φ30- 50mm |
| Dimensions | 305x305x20mm |
| Weight | 1.6 KG |
| Radome Material | UV-ABS |
| Max. Wind Velocity | 210km/h |
| Operating Temperature | -40~+60℃ |

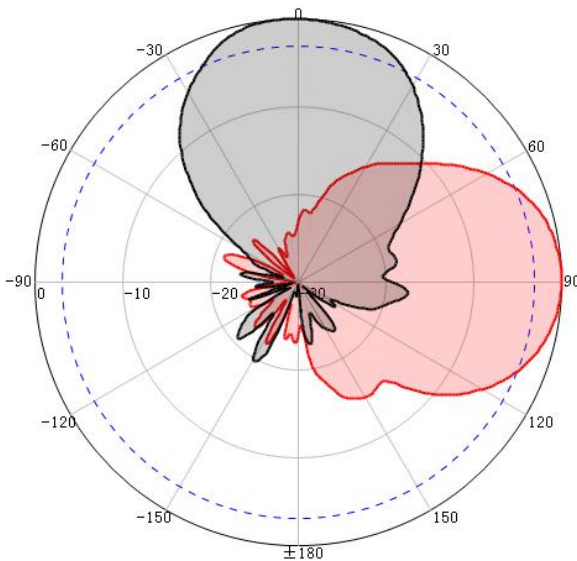

2.4GHz

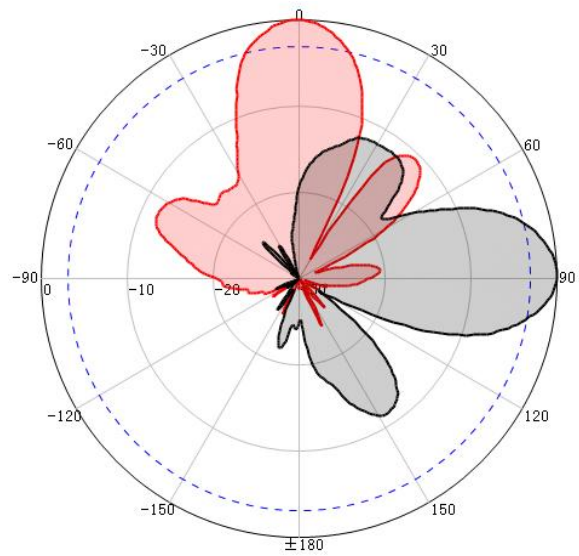

5GHz

SANNY TELECOM EQUIPMENT CO., LTD

Address: Room 201 Building 1, Wanyang Industrial Park, No.82 Xiaotang Industrial Avenue, Shishan Town, Nanhai District, Foshan City 528223, Guangdong Province, China

Tel: +86 757 8766 0070

Fax: +86 757 8766 0500

Email: sales@sannytelecom.com

Website: www.sannytelecom.com