2400-2500MHz 6dBi Dual Polarized Omni Antenna

Model	STO24G6M2
Electrical Specifications	
Frequency Range	2400-2500MHz
Polarization	H+V
Gain	6dBi
VSWR	≤1.5
Horizontal Beamwidth	360°
Vertical Beamwidth	25°
Port-to-port Isolation	≧30dB
Nominal Impedance	50Ω
Maximum Power	50W
Lightning Protection	DC Ground
Mechanical Specifications	
Connector	**2xN-Female**
Mounting Type	Mast Mount
Mounting Mast Size	Φ38-52mm
Dimensions	Ø76×600 mm
Weight	1.5 KG
Max. Wind Velocity	210km/h
Operating Temperature	-40°C to +65 °C

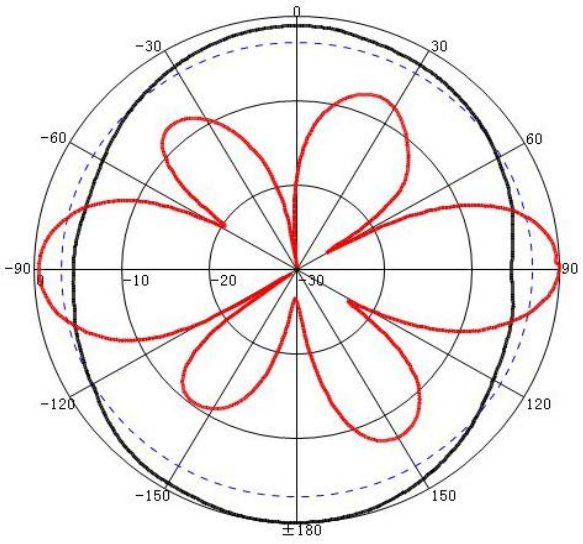

H-Pol @ 2450MHz

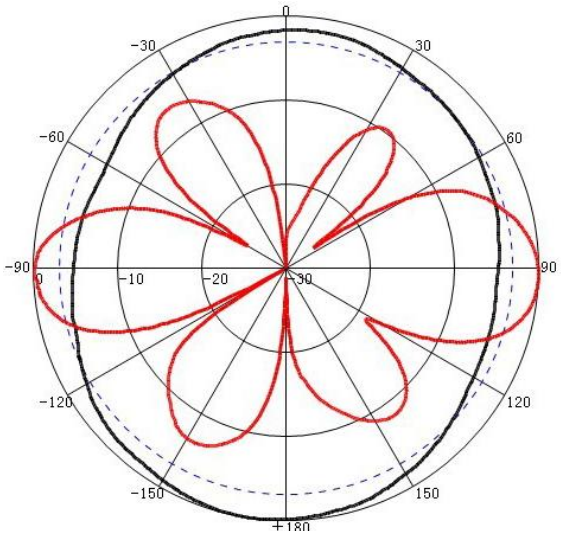

V-Pol @ 2450MHz

SANNY TELECOM EQUIPMENT CO., LIMITED
Address: Room 201 Building 1, Wanyang Industrial Park, No.82 Xiaotang Industrial Avenue, Shishan Town, Nanhai District, Foshan City 528223, Guangdong Province, China
Tel: +86 757 8766 0070 Fax: +86 757 8766 0500
Email: sales@sannytelecom.com Website: www.sannytelecom.com