



## 4900-6500MHz 15dBi 4x4 MIMO Omni Antenna

Model	STO6G15HVM4
<b>Electrical Specifications</b>	
Frequency Range	4900-6500MHz
Polarization	2x (H+V)
Gain	14±1 dBi
VSWR	≤2.0
Horizontal Beamwidth	360°(4x90°)
Vertical Beamwidth	8±2°
Port-to-port Isolation	≥ 28dB
Nominal Impedance	50Ω
Maximum Power	50W
Lightning Protection	DC Ground

<b>Mechanical Specifications</b>	
<b>Connector</b>	<b>4xN-Female</b>
Mounting Type	Mast Mount
Mounting Mast Size	Φ38-60mm
Dimensions	Ø76×510 mm
Weight	2.0 KG
Radome Material	Fiberglass
Max. Wind Velocity	210km/h
Operating Temperature	-40°C to +65 °C

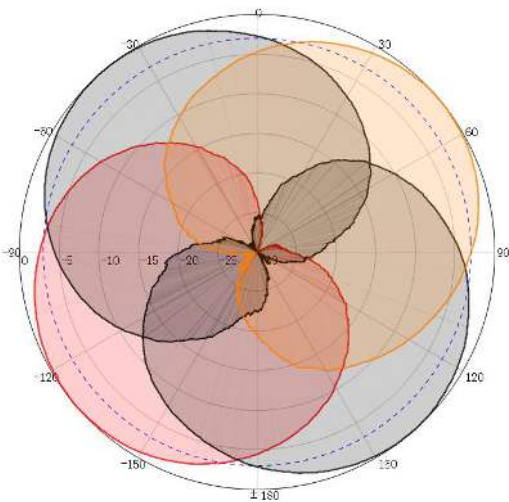

Azimuth patterns

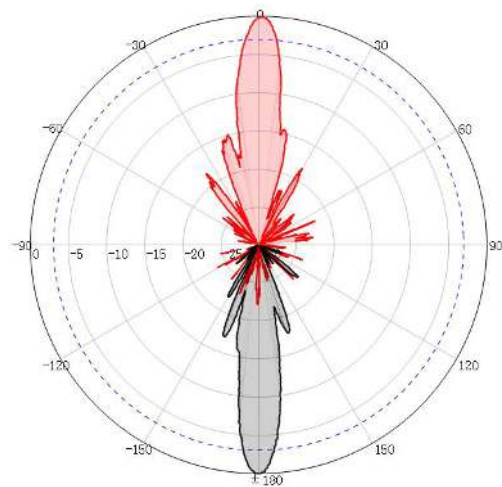

Elevation patterns

### SANNY TELECOM EQUIPMENT CO., LIMITED

Address: Room 201 Building 1, Wanyang Industrial Park, No.82 Xiaotang Industrial Avenue, Shishan Town, Nanhai District, Foshan City 528223, Guangdong Province, China

Tel: +86 757 8766 0070

Fax: +86 757 8766 0500

Email: sales@sannytelecom.com

Website: [www.sannytelecom.com](http://www.sannytelecom.com)