4900-6500MHz 15dBi 4x4 MIMO Omni Antenna

Model	STO6G15HVM4
Electrical Specifications	
Frequency Range	4900-6500MHz
Polarization	2x (H+V)
Gain	14±1 dBi
VSWR	≤2.0
Horizontal Beamwidth	360°(4x90°)
Vertical Beamwidth	8±2°
Port-to-port Isolation	≧28dB
Nominal Impedance	50Ω
Maximum Power	50W
Lightning Protection	DC Ground
Mechanical Specifications	
Connector	**4xN-Female**
Mounting Type	Mast Mount
Mounting Mast Size	Φ38-60mm
Dimensions	Ø76×510 mm
Weight	2.0 KG
Radome Material	Fiberglass
Max. Wind Velocity	210km/h
Operating Temperature	-40°C to +65 °C

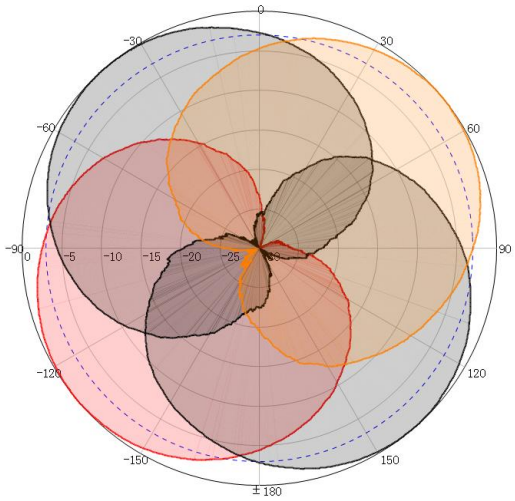

Azimath patterns

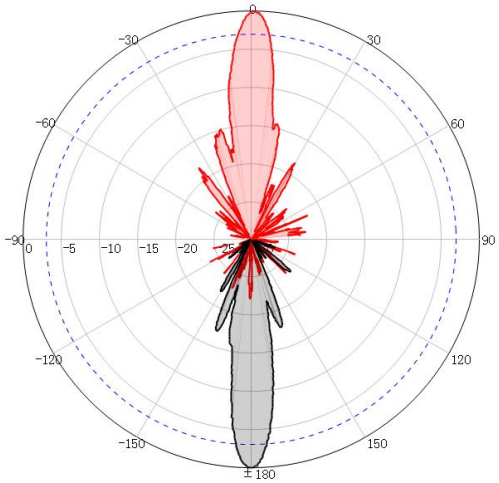

Elevation patterns

SANNY TELECOM EQUIPMENT CO., LIMITED
Address: Room 201 Building 1, Wanyang Industrial Park, No.82 Xiaotang Industrial Avenue, Shishan Town, Nanhai District, Foshan City 528223, Guangdong Province, China
Tel: +86 757 8766 0070 Fax: +86 757 8766 0500
Email: sales@sannytelecom.com Website: www.sannytelecom.com