


2400-2500/5150-5850MHz 19dBi 2x2 MIMO Panel Antenna


Model	STP2458G19XM2
Electrical Specifications	
Frequency Range	2400-2500/5150-5850MHz
Polarization	$\pm 45^\circ$
Gain	19 ± 1 dBi
VSWR	≤ 1.8
Horizontal Beamwidth	(2.4GHz) 26° , (5GHz) 13°
Vertical Beamwidth	(2.4GHz) 26° , (5GHz) 13°
Port-to-Port Isolation	> 28 dB
Nominal Impedance	50Ω
Maximum Power	50W
Lightning Protection	DC Ground



Mechanical Specifications	
Connector	2x N-Female
Mounting Mast Size	$\Phi 30$ - 50mm
Dimensions	370x370x25mm
Weight	2.5 KG
Radome Material	UV-ABS
Max. Wind Velocity	210km/h
Operating Temperature	$-40 \sim +60^\circ\text{C}$

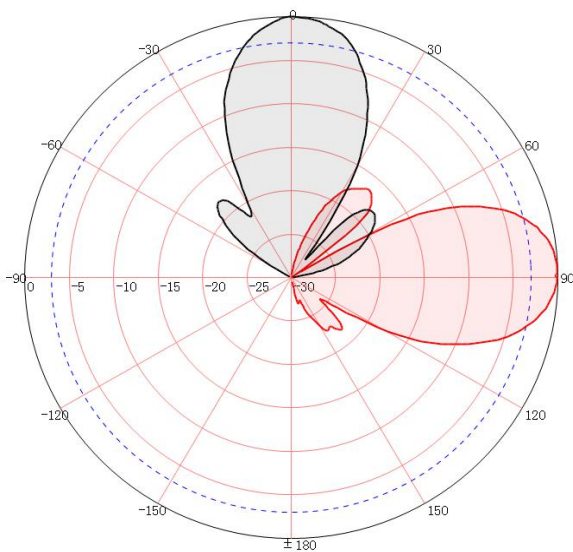

2.4GHz

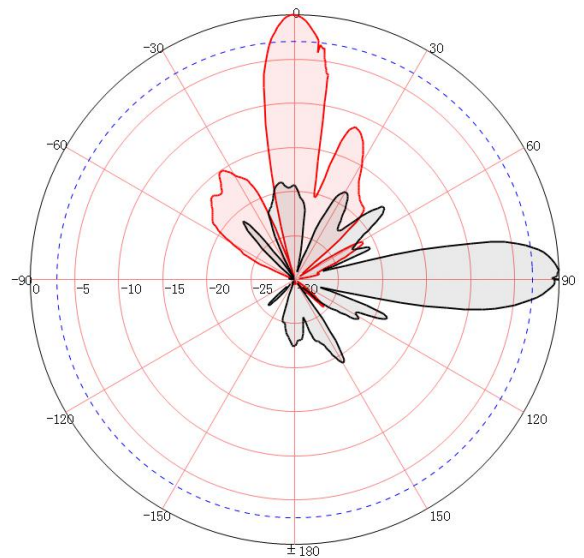

5GHz

SANNY TELECOM EQUIPMENT CO., LTD

Address: Room 201 Building 1, Wanyang Industrial Park, No.82 Xiaotang Industrial Avenue, Shishan Town, Nanhai District, Foshan City 528223, Guangdong Province, China

Tel: +86 757 8766 0070

Fax: +86 757 8766 0500

Email: sales@sannytelecom.com

Website: www.sannytelecom.com