

617-960/1710-2700/3300-6000MHz 3dBi Rubber Duck Antenna



Electrical Specifications					
Model	STRD66G3-SM				
Frequency Range (MHz)	617-698	698-960	1690-2700	3300-4000	4900-6000
Gain (dBi)	1.5 ± 0.5	2.0 ± 0.5	2.5 ± 0.5	4.0 ± 0.5	4.0 ± 0.5
Polarization	Vertical				
VSWR	≤ 2.0	≤ 2.0	≤ 2.5	≤ 2.5	≤ 2.0
Maximum Power	50 W				
Impedance	50 Ω				
Lightning Protection	DC Ground				
Mechanical Specifications					
Connector Type	SMA-male				
Dimensions	197x21x14.6mm				
Antenna Weight	35 G				
Color	Black				
Radome Material	ABS, White, RAL9003				
Operational Humidity	< 95%				
Operational Temperature	-40°C to +65°C				

SANNY TELECOM EQUIPMENT CO., LTD


Address: Room 201 Building 1, Wanyang Industrial Park, No.82 Xiaotang Industrial Avenue,
Shishan Town, Nanhai District, Foshan City 528223, Guangdong Province, China

Tel: +86 757 8766 0070



Fax: +86 757 8766 0500

Email: sales@sannytelecom.com



Website: www.sannytelecom.com

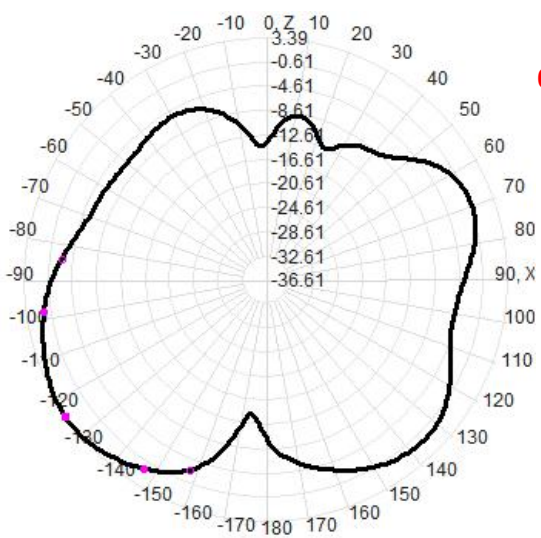


617-960MHz

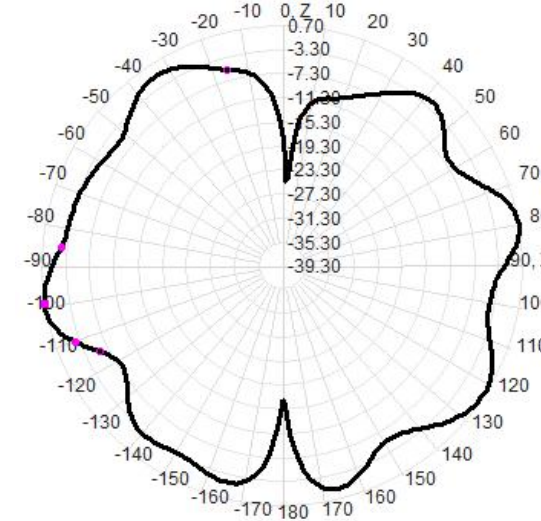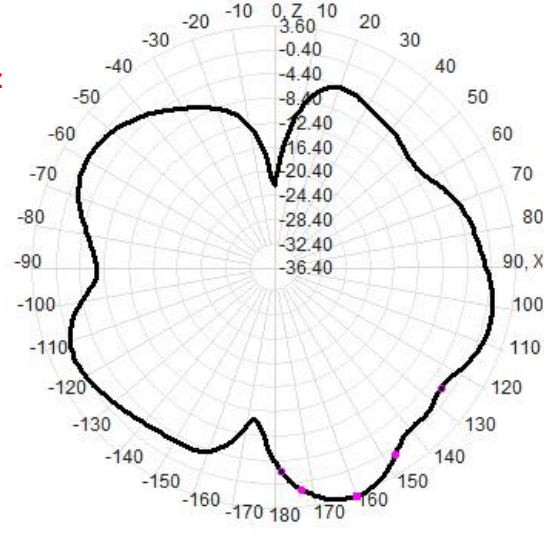

1710-2700MHz

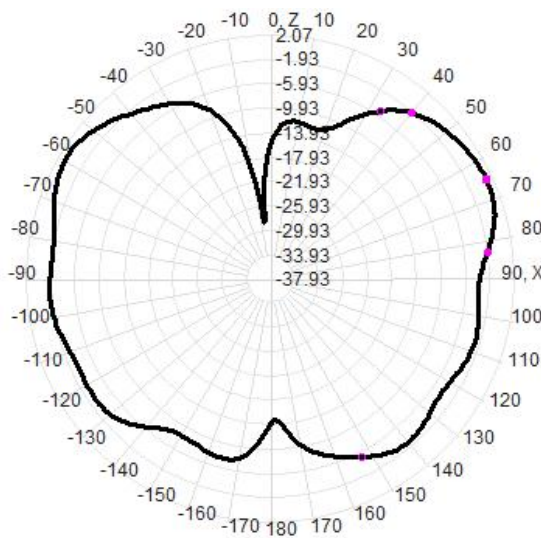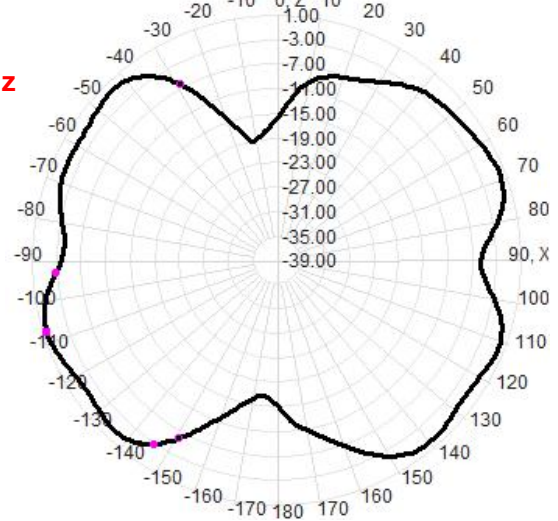

3300-6000MHz

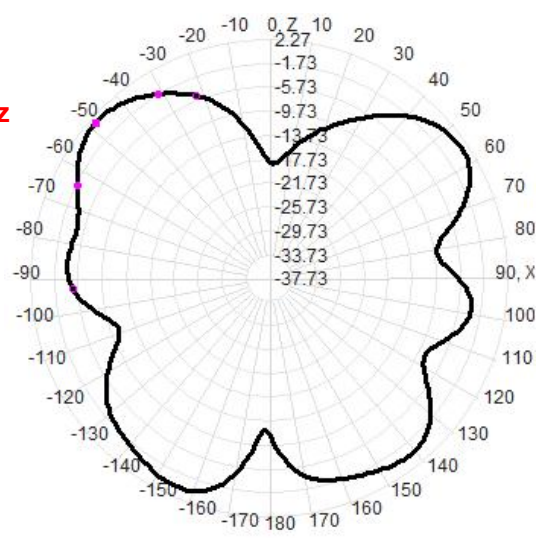

SANNY TELECOM EQUIPMENT CO., LTD

Address: Room 201 Building 1, Wanyang Industrial Park, No.82 Xiaotang Industrial Avenue, Shishan Town, Nanhai District, Foshan City 528223, Guangdong Province, China


Tel: +86 757 8766 0070

Fax: +86 757 8766 0500

Email: sales@sannytelecom.com

Website: www.sannytelecom.com

VSWR Plot @ 617-960/1710-2700/3300-6000MHz

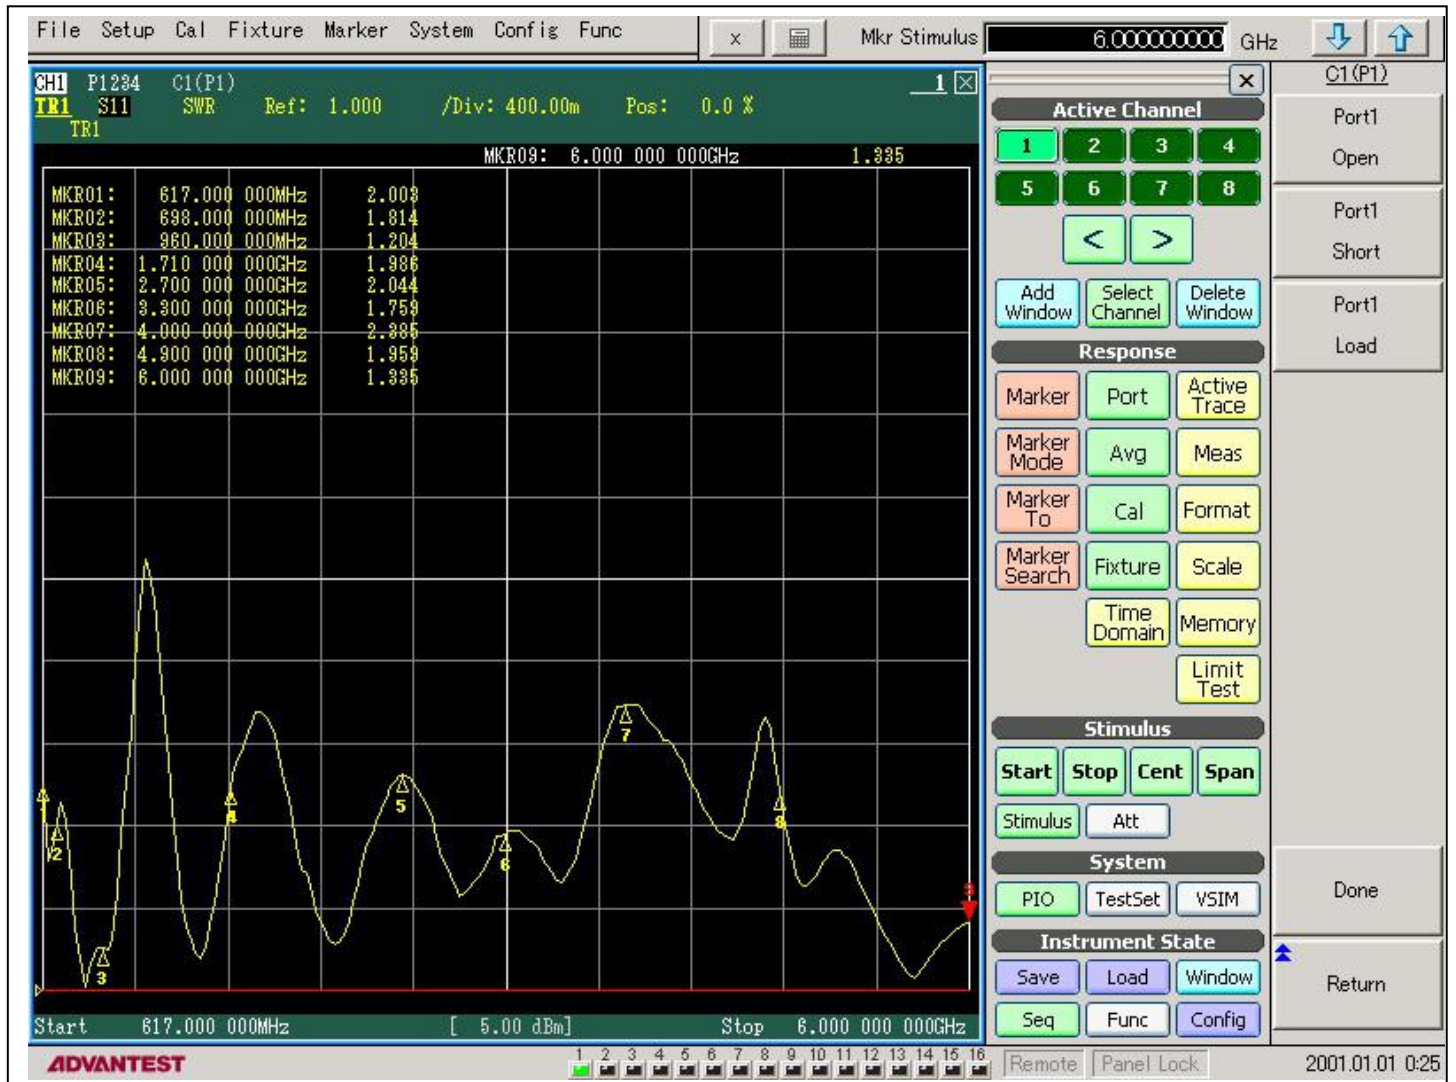

SANNY TELECOM EQUIPMENT CO., LTD

Address: Room 201 Building 1, Wanyang Industrial Park, No.82 Xiaotang Industrial Avenue,
Shishan Town, Nanhai District, Foshan City 528223, Guangdong Province, China

Tel: +86 757 8766 0070

Fax: +86 757 8766 0500

Email: sales@sannytelecom.com

Website: www.sannytelecom.com