


5000-6000MHz 14dBi Dual Polarized Panel Antenna




Model	STP5060G14HVM2
Electrical Specifications	
Frequency Range	5000-6000MHz
Polarization	H+V
Gain	14 ± 0.5 dBi
VSWR	≤ 2.0
Horizontal Beamwidth	32° ± 2°
Vertical Beamwidth	32° ± 2°
F/B Ratio	≥ 26 dB
Port-to-Port Isolation	≥ 25 dB
Nominal Impedance	50Ω
Maximum Power	10 W
Lightning Protection	DC Ground

Mechanical Specifications	
Connector	2x N-Female or customized
Mounting Mast Size	Φ30- 50mm
Dimensions	230x230x30mm
Weight	1.0 KG
Radome Material	UV-ABS
Max. Wind Velocity	210km/h
Operating Temperature	-40~+60°C

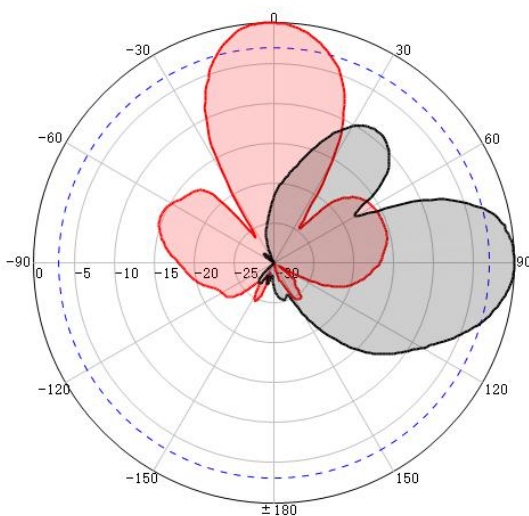

5GHz

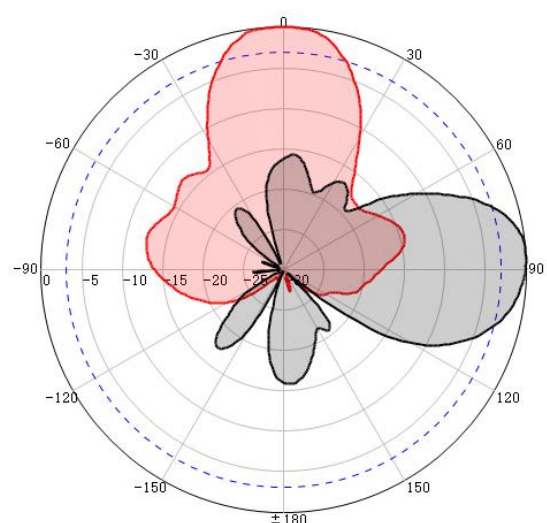

6GHz

SANNY TELECOM EQUIPMENT CO., LTD

Address: Room 201 Building 1, Wanyang Industrial Park, No.82 Xiaotang Industrial Avenue, Shishan Town, Nanhai District, Foshan City 528223, Guangdong Province, China

Tel: +86 757 8766 0070

Fax: +86 757 8766 0500

Email: sales@sannytelecom.com

Website: www.sannytelecom.com