


5850-7200MHz 36dBi Dual-Polarity & X-Polarized Dish Antenna


| Model | STD6EG36M2-PRO-2PK |
|----------------------------------|--|
| Electrical Specifications | |
| Frequency Range | 5850-7200MHz |
| Polarization | Adjustable - Dual Polarized (Vertical and Horizontal) or X-Polarized (+45° and -45°) |
| Gain | 36 dBi |
| VSWR | ≤2.0 |
| Horizontal Beamwidth | 3.5° |
| Vertical Beamwidth | 2.5° |
| F/B Ratio | ≥42 dB |
| Isolation | ≥28 dB |
| Nominal Impedance | 50 Ω |
| Maximum Power | 50 W |
| Lightning protection | DC Ground |



| | |
|----------------------------------|--------------|
| Mechanical Specifications | |
| Connector | 2 x N-Female |
| Mounting Mast size | Φ40-70mm |
| Dimensions | Φ90cm |
| Weight | 9.9 KG |
| Max. Wind Velocity | 210km/h |
| Operating Temperature | -40~+60°C |

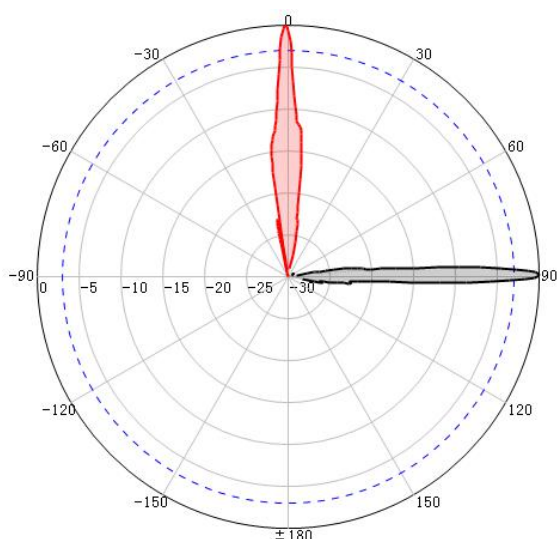

H-Pol

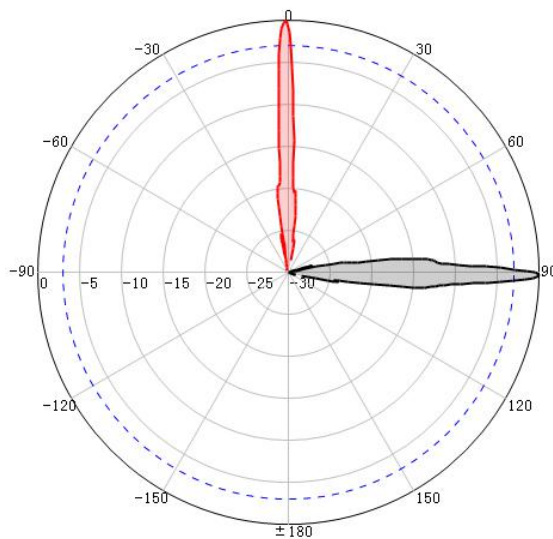

V-Pol

SANNY TELECOM EQUIPMENT CO., LTD

Address: Room 201 Building 1, Wanyang Industrial Park, No.82 Xiaotang Industrial Avenue, Shishan Town, Nanhai District, Foshan City 528223, Guangdong Province, China

Tel: +86 757 8766 0070

Fax: +86 757 8766 0500

Email: sales@sannytelecom.com

Website: www.sannytelecom.com