


2400-2500/5150-5850MHz 15dBi Dual Slant Panel Antenna


Model	STP2458G15XM2
Electrical Specifications	
Frequency Range	2400-2500/5150-5850MHz
Polarization	±45°
Gain	12dBi(2.4GHz) / 15dBi(5GHz)
VSWR	≤2.0
Horizontal Beamwidth	(2.4GHz)43° , (5GHz) 25°
Vertical Beamwidth	(2.4GHz)41° , (5GHz) 25°
Port-to-Port Isolation	> 28dB
Nominal Impedance	50Ω
Maximum Power	50W
Lightning Protection	DC Ground



Mechanical Specifications	
Connector	2x N-Female
Mounting Mast Size	Φ30- 50mm
Dimensions	305x305x20mm
Weight	1.6 KG
Radome Material	UV-ABS
Max. Wind Velocity	210km/h
Operating Temperature	-40~+60℃

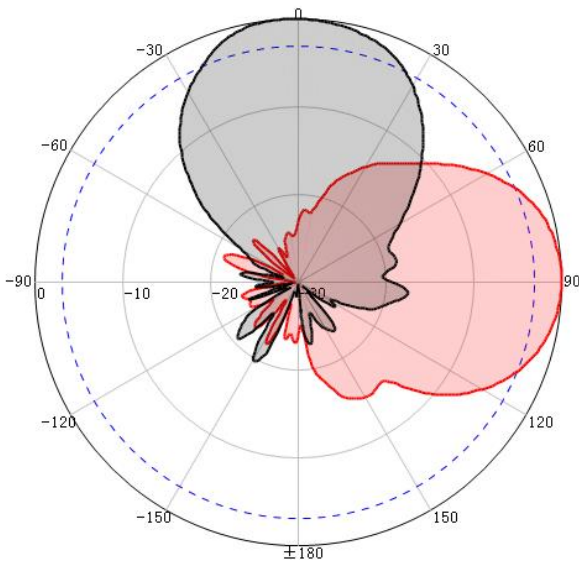

2.4GHz

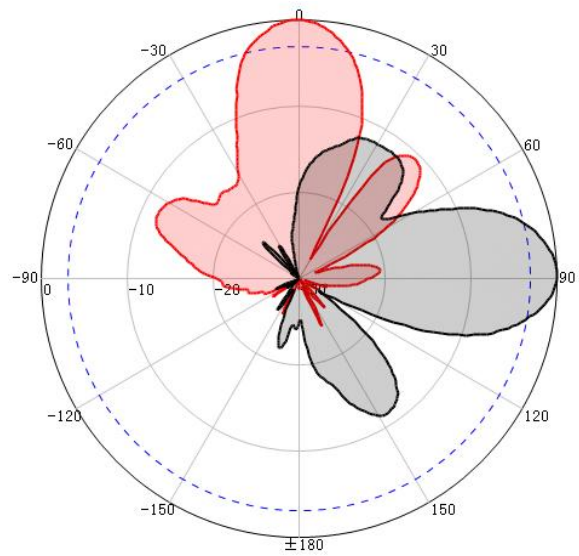

5GHz

SANNY TELECOM EQUIPMENT CO., LTD

Address: Room 201 Building 1, Wanyang Industrial Park, No.82 Xiaotang Industrial Avenue, Shishan Town, Nanhai District, Foshan City 528223, Guangdong Province, China

Tel: +86 757 8766 0070

Fax: +86 757 8766 0500

Email: sales@sannytelecom.com

Website: www.sannytelecom.com